



**1** Locate the vent valve on the Qwik Jon® Choice and remove the vent valve and pipe seal.




**2** Insert the Qwik Alarm® into the vent valve opening. The pipe seal may have to be slid halfway down the alarm before the alarm is placed all the way in. A lubricant such as soapy water may be used.



**3** Remove the top cover and carbon filter.



**4** Remove the battery holder sleeve and circuit board by pinching the black buzzer and pulling upward.

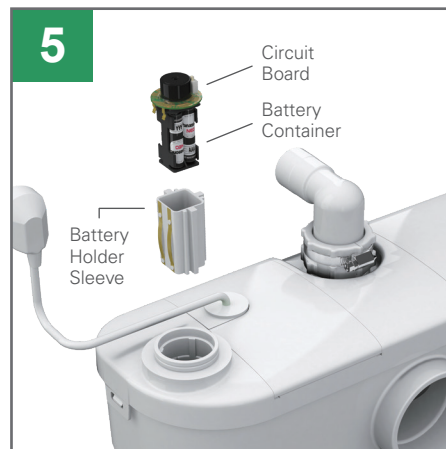

**5** Remove the circuit board and battery container from the battery holder sleeve and place batteries into the battery container.



**6** Ensure that the battery compartment is sealed tightly and that the brass clips contact the top of the brass strips. Set the slide switch on the circuit board to L for low volume or H for high volume.



**7** Reinstall the components and carbon filter back in the alarm main body and put the top cover back on.



Vented (10-5089)



1 找到 Qwik Jon® Choice 上的通氣閥並拆下通氣閥和管道密封件。



2 將 Qwik Alarm® 插入通氣閥開口。在將警報器完全放入之前，可能必須將管道密封件滑至警報器的一半。可在密封件與上蓋處噴灑些許肥皂水增加潤滑以利安裝。



3 拆下 Qwik Alarm® 頂蓋和破濾棉。



4 捏住黑色蜂鳴器向上拉，取出電池座套和電路板。



5 從電池座套中取出電路板和電池盒，將電池放入電池盒中。



6 確保電池倉密封嚴密且黃銅夾接觸黃銅條的頂部。將電路板上的滑動開關設置為 L 為小聲或 H 為大聲。



7 將所有零件裝回警報器主體並重新蓋上頂蓋。



Vented (10-5089)



1 找到 Qwik Jon® Choice 上的通气阀并拆下通气阀和管道密封件。



2 将 Qwik Alarm® 插入通气阀开口。在将警报器完全放入之前，可能必须将管道密封件滑至警报器的一半。可在密封件与上盖处喷洒些许肥皂水增加润滑以利安装。



3 拆下 Qwik Alarm® 顶盖和碳滤棉。



4 捏住黑色蜂鸣器向上拉，取出电池座套和电路板。



5 从电池座套中取出电路板和电池盒，将电池放入电池盒中。



6 确保电池仓密封严密且黄铜夹接触黄铜条的顶部。将电路板上的滑动开关设置为 L 为小声或 H 为大声。



7 将所有零件装回警报器主体并重新盖上顶盖。