



Standard (10-5288)



Remove the tank lid from the Qwik Jon® Premier and use a hole saw to make a 2-3/8" (60 mm) diameter opening on the flat surface.




Insert the Qwik Alarm® into the opening. The pipe seal may have to be slid halfway down the alarm before the alarm is placed all the way in. A lubricant such as soapy water may be used.



Remove the top cover of the Qwik Alarm®.



Remove the battery holder sleeve and circuit board by pinching the black buzzer and pulling upward.

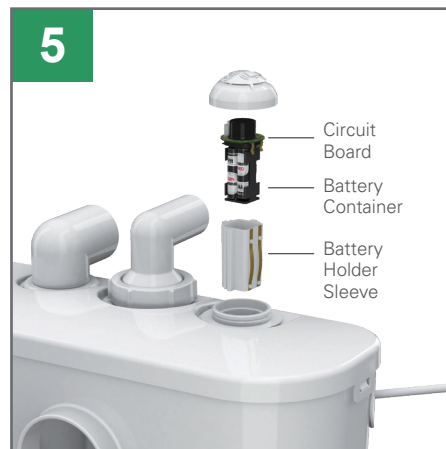

Remove the circuit board and battery container from the battery holder sleeve and place batteries into the battery container.



Ensure that the battery compartment is sealed tightly and that the brass clips contact the top of the brass strips. Set the slide switch on the circuit board to L for low volume or H for high volume.



Reinstall the components back in the alarm main body and put the top cover back on.



Standard (10-5288)



從 Qwik Jon® Premier 取下水箱蓋，並使用孔鋸在平面上開一個2-3/8英寸 (60 mm) 直徑的開口。



將 Qwik Alarm® 插入開口。在將警報器完全放入之前，可能必須將管道密封件滑至警報器的一半。可在密封件與上蓋處噴灑些許肥皂水增加潤滑以利安裝。



取下 Qwik Alarm® 頂蓋。



捏住黑色蜂鳴器向上拉，取出電池座套和電路板。



從電池座套中取出電路板和電池盒，將電池放入電池盒中。



確保電池盒密封嚴密且黃銅夾接觸黃銅條的頂部。將電路板上的滑動開關設置為 L 為小聲或 H 為大聲。



將所有零件裝回警報器主體並重新蓋上頂蓋。



1 从 Qwik Jon® Premier 取下水箱盖，并使用孔锯在平面上开一个2-3/8英寸 (60 mm) 直径的开口。



2 将 Qwik Alarm® 插入开口。在将警报器完全放入之前，可能必须将管道密封件滑至警报器的一半。可在密封件与上盖处喷洒些许肥皂水增加润滑以利安装。



3 取下 Qwik Alarm® 顶盖。



4 捏住黑色蜂鸣器向上拉，取出电池座套和电路板。



5 从电池座套中取出电路板和电池盒，将电池放入电池盒中。



6 确保电池仓密封严密且黄铜夹接触黄铜条的顶部。将电路板上的滑动开关设置为 L 为小声或 H 为大声。



7 将所有零件装回警报器主体并重新盖上顶盖。