

# Model 2522

60 Hz

## Submersible Effluent Pump

### Features:

- Cast iron ASTM A48 Class 30
- Ductile iron impeller for superior quality and long life
- Semi-open impeller design reduces bearing load, increases bearing life and prevents clogging
- Double carbon / ceramic mechanical seal
- Thermal overload is mounted directly on the windings in the single phase models for maximum temperature sensing
- Oil-filled motor for better cooling and lubrication
- The cord seal is epoxy-potted for superior moisture resistance and anti-wicking
- 1-1/2" NPT discharge
- Passes 3/4" (19 mm) spherical solids
- Standard 30' (9 m) cord

### Applications:

- Effluent handling
- Dewatering
- Water transfer


**100% factory tested**



Trusted. Tested. Tough.®



ZT0265\_Ea  
0721  
Supersedes  
0817

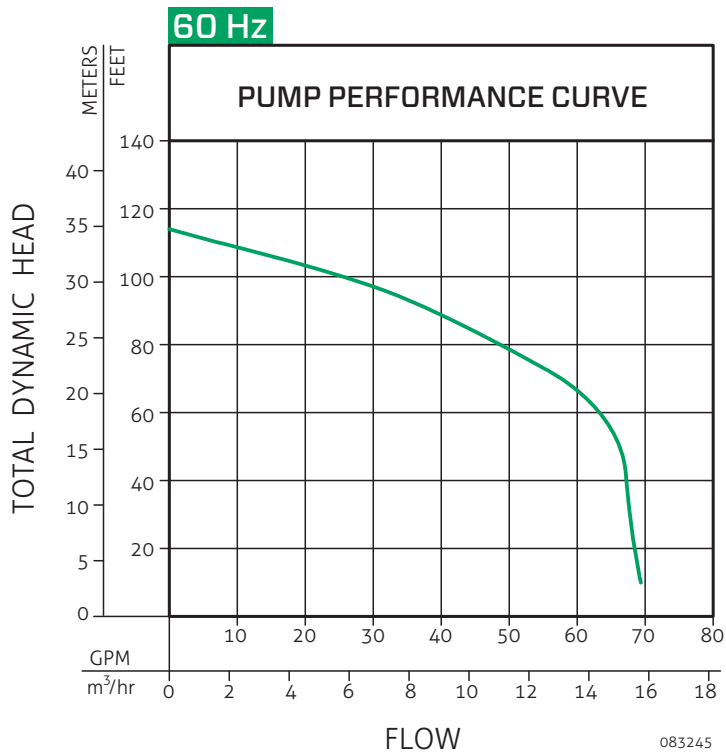

**60 Hz**

Model	Mode	Volts (V)	Ph $\emptyset$	Amps (A)	Motor		Weight	
					HP	kW (p1)	kg	lbs
2522	Non-Auto	230	1	14	1	3.3	33	73

