

# Model 2701

60 Hz

## Submersible Grinder Pump

### Features:

- Hardened 440 stainless steel (56-60 Rockwell) shredding ring and cutter
- Cast iron ASTM A48 Class 30
- Semi-open impeller prevents clogging
- Ductile iron impeller for superior quality and long life
- Single carbon / ceramic mechanical seal
- Thermal overload is mounted directly on the windings in the single phase models for maximum temperature sensing
- Oil-filled motor for better cooling and lubrication
- The cord seal is epoxy-potted for superior moisture resistance and anti-wicking
- Capacitor Start Capacitor Run motor.
- 1-1/4" NPT discharge
- Standard 4.5 m (15') cord
- Simplex and duplex package systems available

Consult factory for special applications:

- Control panel available: simplex – P/N 10-3475, duplex – P/N 10-3476
- Rail systems available: P/N 2039-0006
- Minimum recommended basin size:  
simplex – 18" x 30" (460 x 760 mm),  
duplex – 30" x 36" (760 x 910 mm)
- High water alarms available

### Applications:

- Low pressure sewer systems
- High head sewage systems
- Domestic, commercial, wastewater and sewage

**100% factory tested**




Trusted. Tested. Tough.®




Shredding Ring  
and Cutter

ZT0428\_Ea  
1020  
Supersedes  
0918

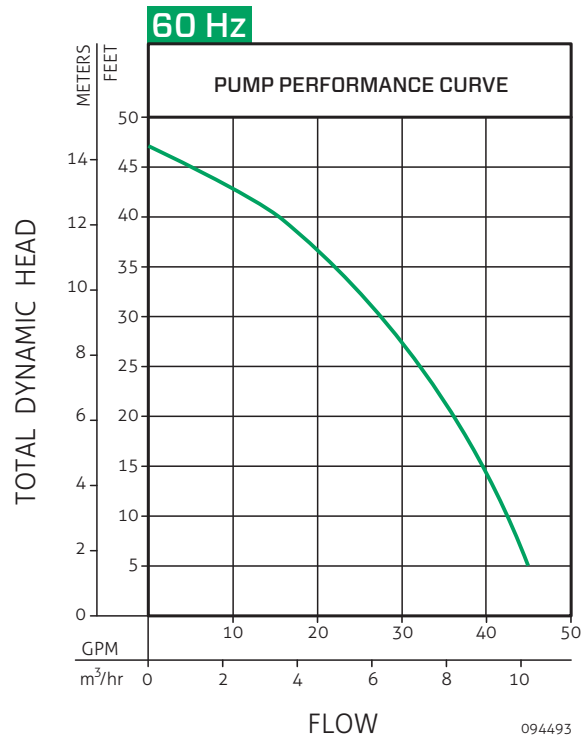

**60 Hz**

Model	Mode	Volts (V)	Ph Ø	Amps (A)	Motor		Weight	
					HP	kW (p1)	kg	lbs
N2701	Non-Auto	115	1	12	1	1.38	24.6	54
WM2701	Auto-Tethered	115	1	12	1	1.38	24.9	55
BN2701	Piggyback	115	1	12	1	1.38	25.4	56

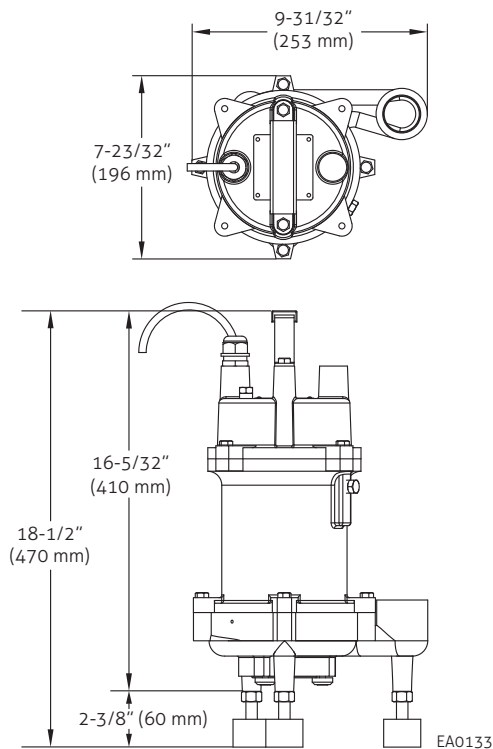

Product information presented here reflects conditions at time of publication.  
Consult factory regarding discrepancies or inconsistencies.

© Copyright 2020 Zoeller® Co. All rights reserved.  
[www.zoellerpumps.com](http://www.zoellerpumps.com)

